



DIGITAL KEY SAT TEAM



PRESENTA

Come lampeggiare DREAMBOX 900 UHD

Ecco un immagine tutorial l'installazione di una nuova immagine sul nuovo decoder **DM900UHD**
Per questo tutorial è necessario.

Materiale:

Un decoder **DREAMBOX 900 UHD**

Un computer con un browser web (Firefox, Internet Explorer, Chrome, ..)

software:

Immagine per **DREAMBOX 900 UHD**

oozoon

OpenATV

istruzione

- Scarica l'immagine desiderata.
- Assicurarsi che l'immagine viene scaricato come **xxxxx.tar.xz** ,
- Scollegare il ricevitore dalla derrier interruttore



- Accendere il **DM900** e rapidamente premere e tenere premuto il pulsante di sospensione "ON", alloggiamento chiaro STANDBY lampeggia / lampeggia rosso e viola quando il pulsante è rosso in modo permanente, rilasciare il pulsante.
- Annotare l'indirizzo IP che viene visualizzato sul televisore, nel nostro caso (192.168.1.100)

DREAMBOX

www.dvbxtreme.com



DM900 Rescue Loader #103

Device information

Online recovery

Firmware upload

Settings Backup

Settings Restore

If you see this, your Dreambox didn't boot its operating system. Unless you interrupted the boot process manually, this usually means that there's no valid operating system installed

- Ora vai sul computer, avviare il browser Web e digitare l'indirizzo IP che già memorizzare



Firmware upload


Please select a firmware package to install. Typically, such a package is a compressed tarball (ending in tar.gz, tar.bz2 or tar.xz) similar to "dreambox-image.tar.xz".

For the latest releases check dreamboxupdate.com.

Browse... 

Backup current settings before flashing


Restore settings after flashing

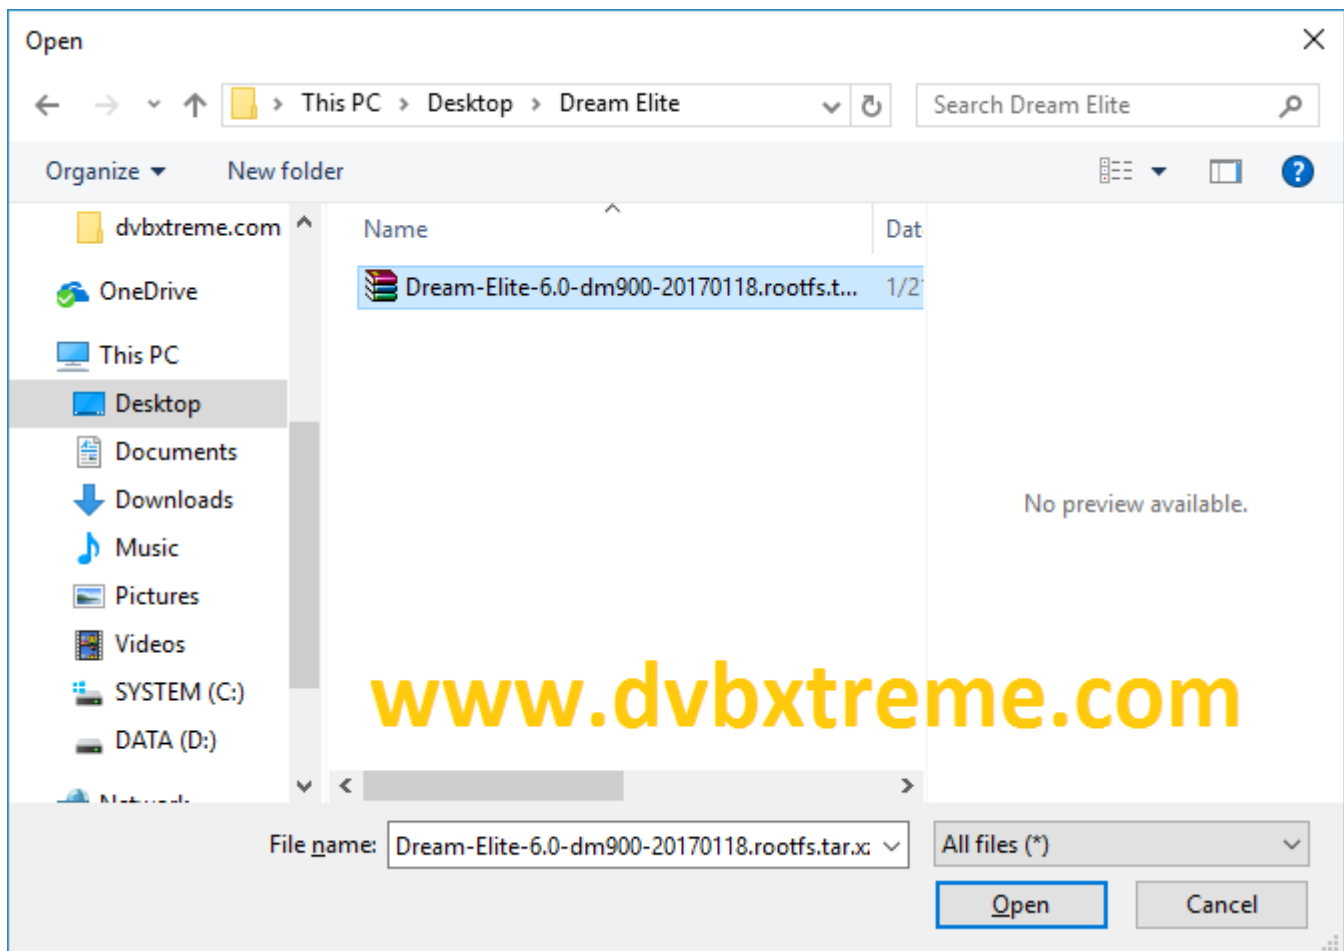

- Nel browser Cliccare su " **Firmware Upload** " Sfoglia l'immagine che si desidera installare il **DM900** e preme **aperto** .

Dreambox DM900 - upl × +

192.168.1.100/upload.dhtml



Firmware upload

Please select a firmware package to install. Typically, such a package is a compressed tarball (ending in tar.gz, tar.bz2 or tar.xz) similar to "dreambox-image.tar.xz".

For the latest releases check dreamboxupdate.com.

Backup current settings before flashing

Restore settings after flashing

Note: The file upload may take several minutes. Please be patient.

Poi clicca su **GO** per avviare il flash del Dreambox 900 UHD

Firmware upload

www.dvbxtreme.com

Console log:

```
[*] Remounting '/dev/mmcblk0p3' to '/data'  
[*] Creating ext4 filesystem 'dreambox-rootfs' on /dev/mmcblk0  
mke2fs 1.43-WIP (18-May-2015)  
Discarding device blocks: 4096/253952 done  
Creating filesystem with 253952 4k blocks and 63488 inodes  
Filesystem UUID: d8f33f80-7361-4465-9ed0-0f4bf04a1078  
Superblock backups stored on blocks:  
32768, 98304, 163840, 229376  
  
Allocating group tables: 0/8 done  
Writing inode tables: 0/8 done  
Creating journal (4096 blocks): done  
Writing superblocks and filesystem accounting information: 0/8  
  
[*] Mounting '/dev/mmcblk0p2' to '/mnt'  
[*] Extracting '/tmp/6maUKI' to '/mnt'
```

Progress dell'installazione dell'immagine

Dreambox DM900 - flas x +

192.168.1.100/flash.dhtml

```
[^] Mounting '/dev/mmcblk0p2' to '/mnt'
[*] Extracting '/tmp/6maUKI' to '/mnt'
[*] Mounting '/dev' to '/mnt/dev'
[*] Mounting '/proc' to '/mnt/proc'
[*] Mounting '/run' to '/mnt/run'
[*] Mounting '/sys' to '/mnt/sys'
[*] Mounting '/tmp' to '/mnt/tmp'
update-alternatives: error: cannot append to '/var/log/alternatives.conf'
[*] Writing /boot/zImage-3.14-1.15-dm900 to /dev/mmcblk0p1
62+1 records in
62+1 records out
4106712 bytes (3.9MB) copied, 0.316460 seconds, 12.4MB/s
[*] Unmounting '/mnt/dev'
[*] Unmounting '/mnt/proc'
[*] Unmounting '/mnt/run'
[*] Unmounting '/mnt/sys'
[*] Unmounting '/mnt/tmp'
[*] Unmounting '/mnt'
[*] Unmounting '/data'
[*] Finished successfully. You may reboot now.
```

www.dvbxtreme.com



- Dopo il flash, fai clic su " **clicca qui per Reboot** ".



- Il vostro Dreambox ora inizia normalmente con l'immagine che abbiamo installato.

BY



DIGITAL KEY SAT TEAM

